

{ Design. Uniqueness. Innovations }

SLINEX



2019 CATALOGUE



SLINEX

The Slinex company was established in 2005. Since then, Slinex has been constantly developing, creating more and more new video intercom models, outdoor panels, and other associated equipment. The company's motto – Design, Uniqueness, Innovations.

{ Design }

Well-known specialists from all over the world are involved into design development of Slinex products. The outstanding German design has always been the embodiment of efficiency and functionality, and now it is reflected in the video intercom systems design. Our products have been nominated for the famous world design awards. High quality aluminum, glass, stainless steel, and other natural materials are used in Slinex intercoms. The client is our main priority, so we do pay much attention to usability of our intercoms user interfaces.

{ Uniqueness }

Each product has its remarkable features and that makes Slinex highly competitive. Ability to transfer the call to application, AHD, DVR, software motion detection – it is not a complete list of functions we are proud of. The latest Slinex SL-10IPT intercom makes it possible to connect your video intercom system and your wireless smart home.

{ Innovations }

Slinex creates intercom industry trends instead of following them. Our team is always up-to-date with security market demands and does their best to satisfy all possible customer needs, using advanced tech solutions. We believe there is always a better way to do something and we are committed to continuous improvement. Learning is a lifelong process.



Video intercoms




SL-10IPT



SL-10M



SL-07IP

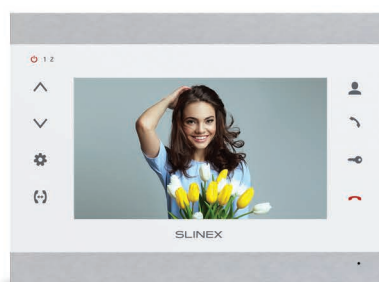


SL-07M



SQ-07MT HD



SM-07M



SQ-04M



SQ-04

Outdoor panels



ML-20IP



ML-20CR



ML-20HD



MA-02



MA-04



MA-08



ML-16HR



ML-15HR



RD-30



XR-30IP

SL-10IPT

10" color TFT touch screen 16:9
the latest world design trends



Slinex SL-10IPT is a unique combination of rigorous style, great design, and functionality.

The large touch screen, aluminum body, integrated Wi-Fi and the ability to transmit video calls to the smartphone, up to 128 GB SD cards support – are not the only advantages of this video intercom. Wherever you are, you can always view the image from the outdoor panel or cameras via your mobile phone connected to the Internet.

Moreover, you can also interact with your visitor calling from the panel and unlock the door. Intercom Slinex SL-10IPT is a perfect addition to your interior, providing safety for you, your family and your business.

Model: **SL-10IPT**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

10" color TFT touch screen 16:9

Screen resolution: 1024×600

MEMORY

SD card, up to 128 GB

EXTENSION

Outdoor panels quantity: 2 panels

Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 12W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

SL-10M, SL-07M, SQ-07MT HD, SM-07M, SQ-04M, up to 4 monitors. SL-10IPT can only be used as a main monitor in the system.

INSTALLATION

Surface mount

COLORS


Black + silver, white + silver, black + gold

DIMENSIONS

304×190×24 mm

UNIQUE FEATURES

- Receiving a call using application on smatphone
- Integrated Wi-Fi
- Ethernet network connection
- Quadrator
- Software motion detection
- Remote viewing of panels and stored archive
- 16 polyphonic ringtones

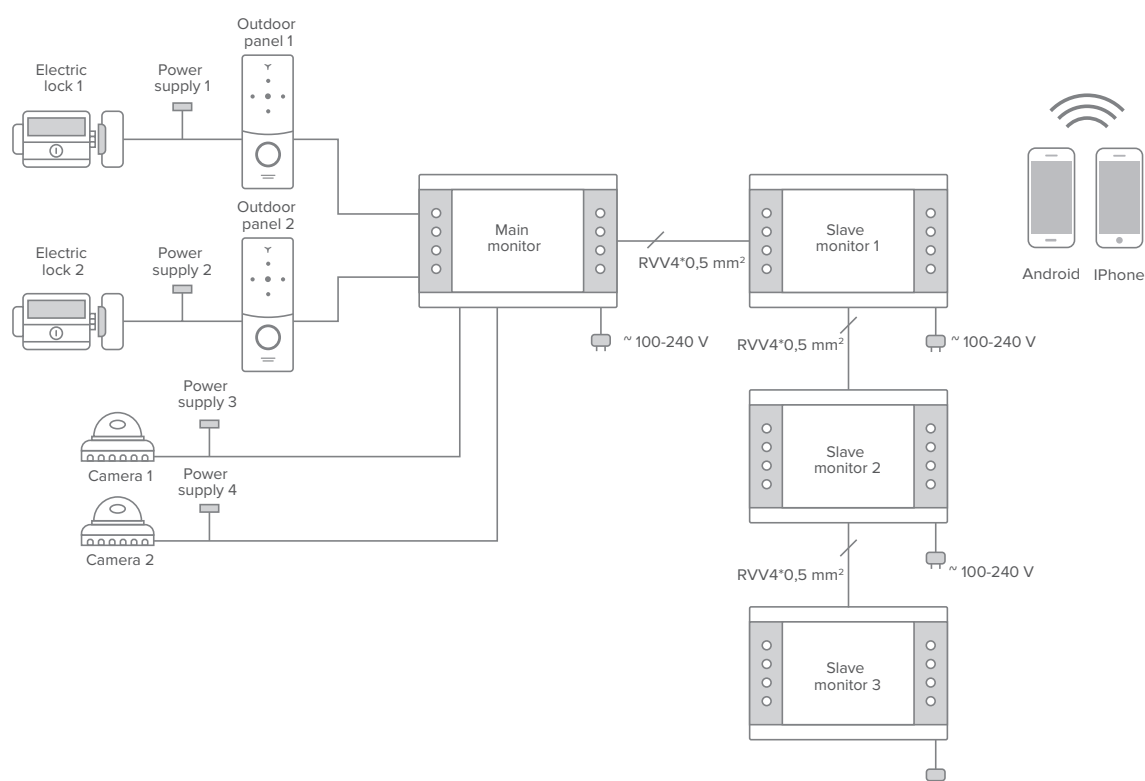

SL-10M

10" color TFT screen 16:9
the latest world design trends



Slinex SL-10M is designed to ensure your comfort and safety.

The software motion detection of Slinex SL-10M video intercom detects every moving object and records it automatically on an SD card. Simple and friendly graphical interface gives a user a uniformity in operation. There are a lot of individual settings available, such as "Do not disturb" mode, ability to turn off the backlight of buttons, mute the sound of button presses, choice of volume modes and duration of ringtone.

Model: **SL-10M**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

10" color TFT touch screen 16:9
Screen resolution: 1024×600

MEMORY

SD card, up to 32 GB

EXTENSION

Outdoor panels quantity: 2 panels
Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 12W
Power: AC 100-240V or DC 13.5V
Power supply: built-in

INTERCOM

SL-10IPT, SL-10M, SL-07IP, SL-07M, SQ-07MT, SM-07M, SQ-04M, MS-04, up to 4 monitors in the intercom. The main ones in the intercom can only be SL-10IPT or SL-07IP monitors.

INSTALLATION

Surface mount

COLORS


White + silver, black + silver

DIMENSIONS

305×190×23 mm

UNIQUE FEATURES

- Software motion detection
- "Do not disturb" mode
- Three volume modes depending on current time
- Adjustable call and conversation volume, brightness, contrast, and tuning for each channel
- Time display in standby mode
- Door panel button backlight control
- 12 polyphonic ringtones

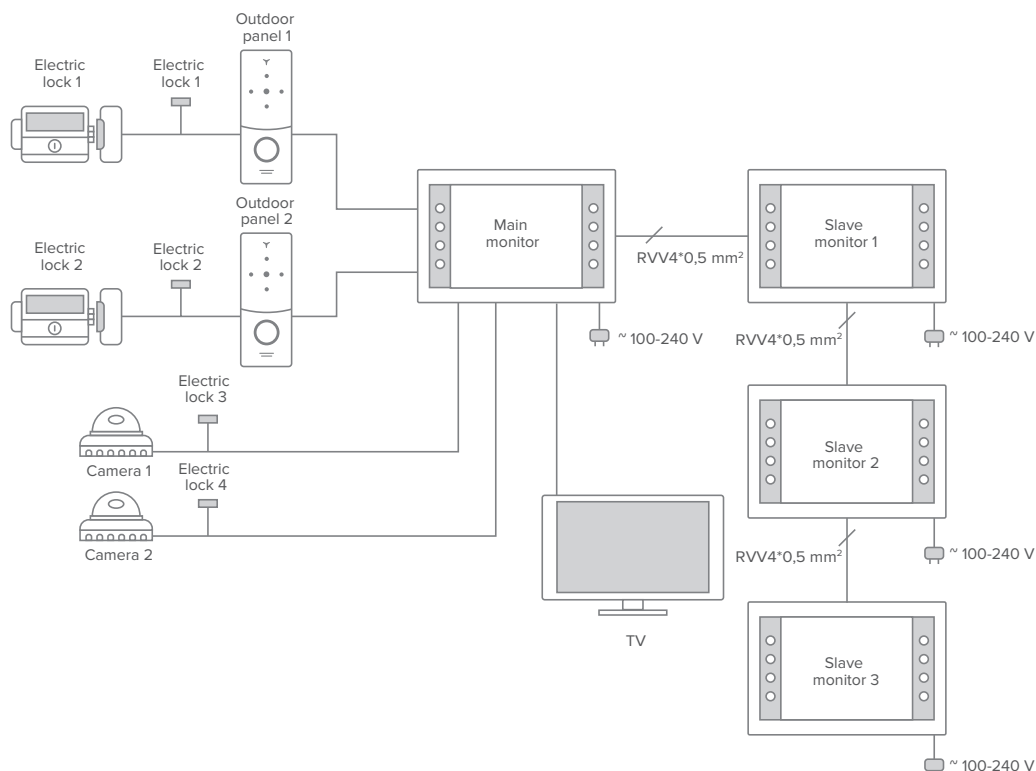

SL-07IP

7" color TFT screen 16:9
the latest world design trends



Slinex SL-07IP is a balanced mix of stylish design and modern functionality.

The monitor could be easily controlled with the application on your smartphone.

The body, made of aluminum and glass, gives the device a presentable appearance and extends its lifetime.

There is a microSD port, the intercom supports cards up to 32 GB. You can connect SL-07IP to the internet via Wi-Fi or Ethernet and view real-time video from the outdoor panels from a smartphone or a tablet. It is also possible to get access to the video archive remotely through the Slinex application on your mobile device.

Model: **SL-07IP**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

7" color TFT screen 16:9

Screen resolution: 800×480

MEMORY

MicroSD card, up to 32 GB

EXTENSION

Outdoor panels quantity: 2 panels

Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 12W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

SL-10M, SL-07M, SQ-07MT HD, SM-07M, SQ-04M, up to 4 monitors. SL-07IP can only be used as a main monitor in the system.

INSTALLATION

Surface mount

COLORS


White + silver, black + silver

DIMENSIONS

230×165×22 mm

UNIQUE FEATURES

- Software motion detection
- Receiving a call using application on smartphone
- Integrated Wi-Fi (external antenna)
- Ethernet network connection
- Remote viewing of panels and stored archive
- 16 polyphonic ringtones

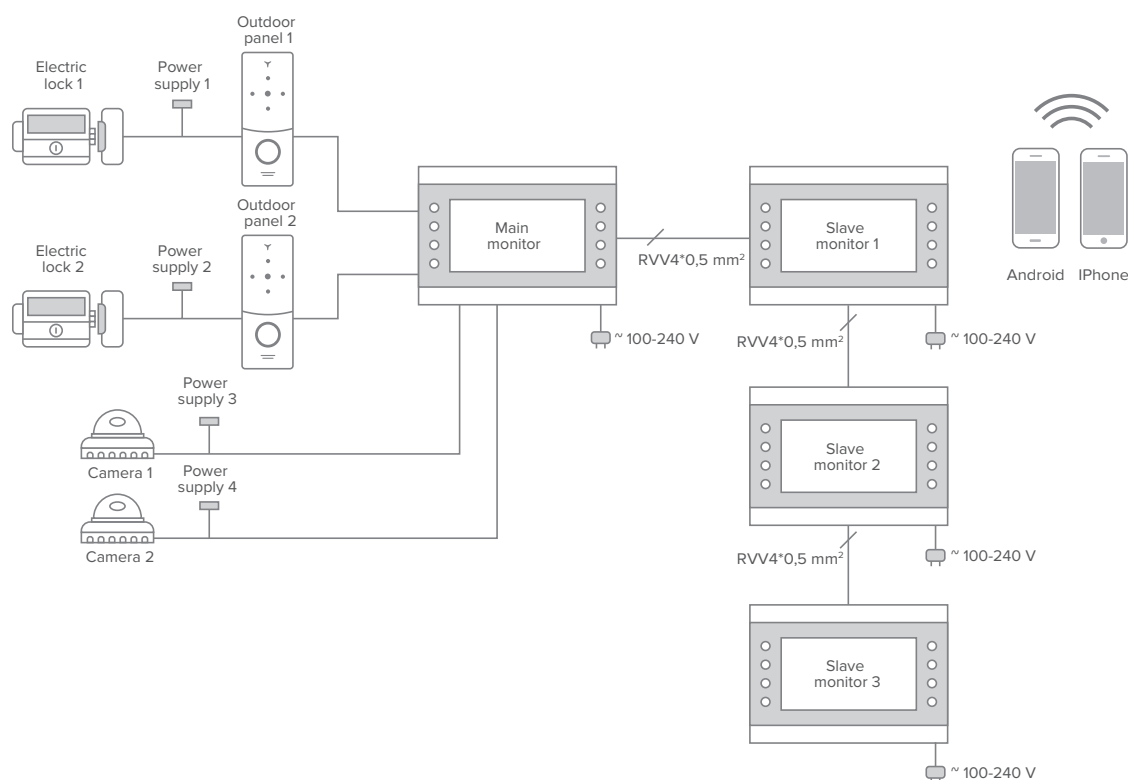

SL-07M

7" color TFT screen 16:9
the latest world design trends



This video intercom is made in the stylish body of the SL series.

This video intercom is made in the stylish body of the SL series.

It is an optimum choice for modern offices or apartments, where owners expect a beautiful and technologically advanced device. This intercom has all the main characteristics that contemporary intercoms have. It is possible to connect two outdoor panels and two additional cameras to SL-07M.

A software motion detection will make photo and video records of all the movements that are caught by the camera near your entrance. All records will be stored on the microSD card.

Model: **SL-07M**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

7" color TFT screen 16:9

Screen resolution: 800×480

MEMORY

MicroSD card, up to 32 GB

EXTENSION

Outdoor panels quantity: 2 panels

Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 12W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

SL-10IPT, SL-10M, SL-07IP, SL-07M, SQ-07MT, SM-07M, SQ-04M, MS-04, up to 4 monitors in the intercom. The main ones in the intercom can only be SL-10IPT or SL-07IP monitors.

INSTALLATION

Surface mount

COLORS


White + silver, black + silver

DIMENSIONS

230×165×22 mm

UNIQUE FEATURES

- Software motion detection
- "Do not disturb" mode
- Individual call melody for each door panel
- Adjustable lock opening time
- Adjustable brightness, contrast, and saturation for each channel separately
- Time display in standby mode
- Buttons backlight control

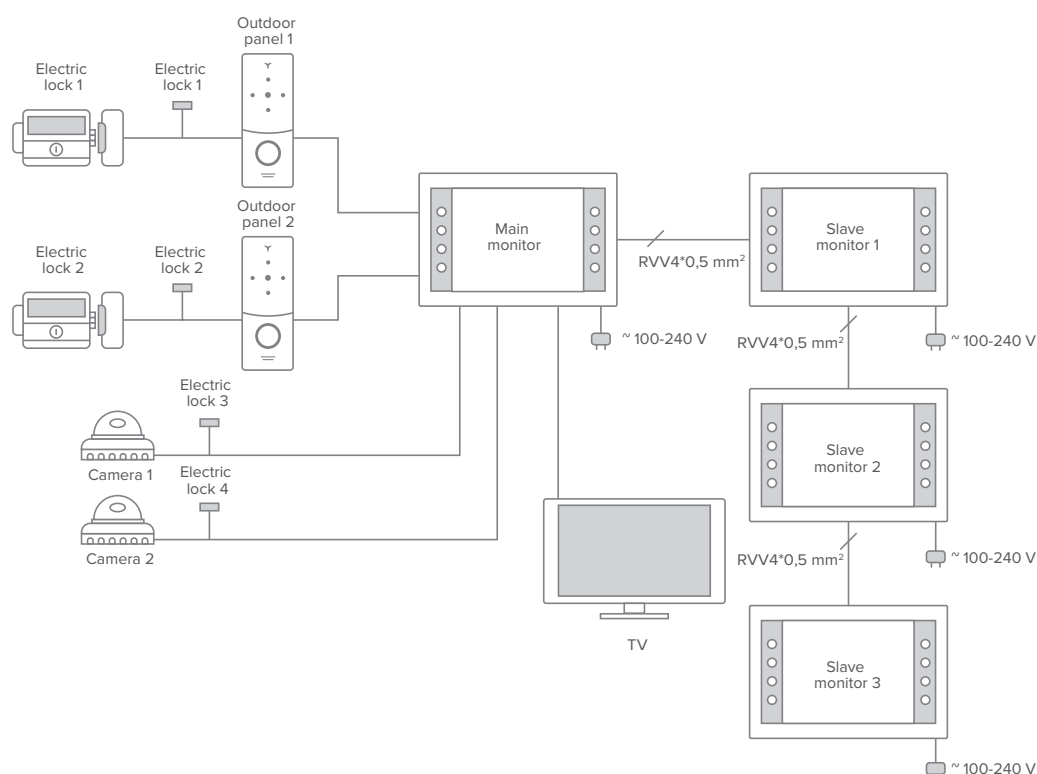

SQ-07MT HD

7" color TFT touch screen 16:9
ultra-thin and functional monitor



SQ-07MT HD, a bestselling model, is great combination of price and functionality.

The intercom has not only an ultra-thin body but also a touch screen. Now it is even more convenient, faster and easier to control your intercom. SQ-07MT HD is equipped with motion detection software. By configuring the detection on any of the cameras or outdoor panels the monitor will respond to motion and automatically record video on an external memory.

Model: **SQ-07MT HD**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

7" color TFT touch screen 16:9

Screen resolution: 1024×600

MEMORY

MicroSD card, up to 64 GB

EXTENSION

Outdoor panels quantity: 2 panels

Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 10W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

SL-10IPT, SL-10M, SL-07IP, SL-07M, SQ-07MT HD, SM-07M, SQ-04M, up to 4 monitors*. SL-10IPT or SL-07IP can only be used as a main monitor in the system.

*up to 3 monitors in AHD mode.

INSTALLATION

Surface mount

COLORS


White, black

DIMENSIONS

197×127×20 mm


UNIQUE FEATURES

- Support for call panels and high-resolution cameras of standards AHD, TVI, CVI, with a resolution of up to 1080p (2 megapixel)
- MP3 ringing tones
- Software motion detection
- Call melody duration setting
- Three volume modes depending on current time
- "Don't disturb" mode
- Time display in standby mode
- Turn off button's backlight

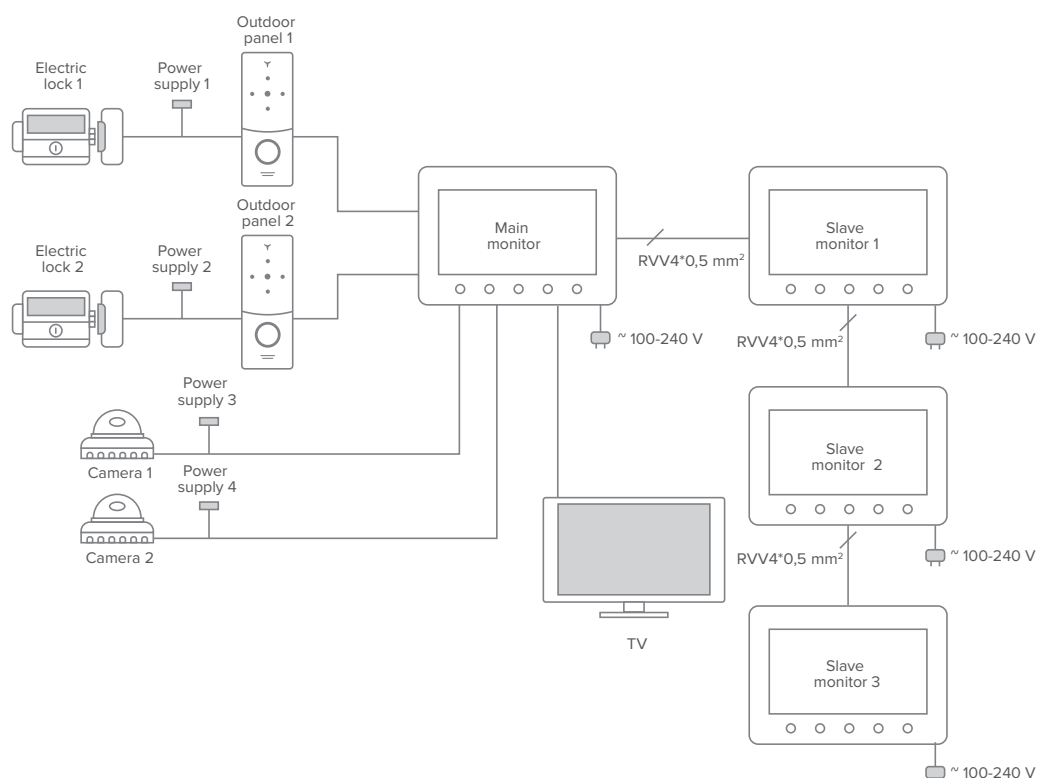

SM-07M

7" color TFT screen 16:9
functional and compact device

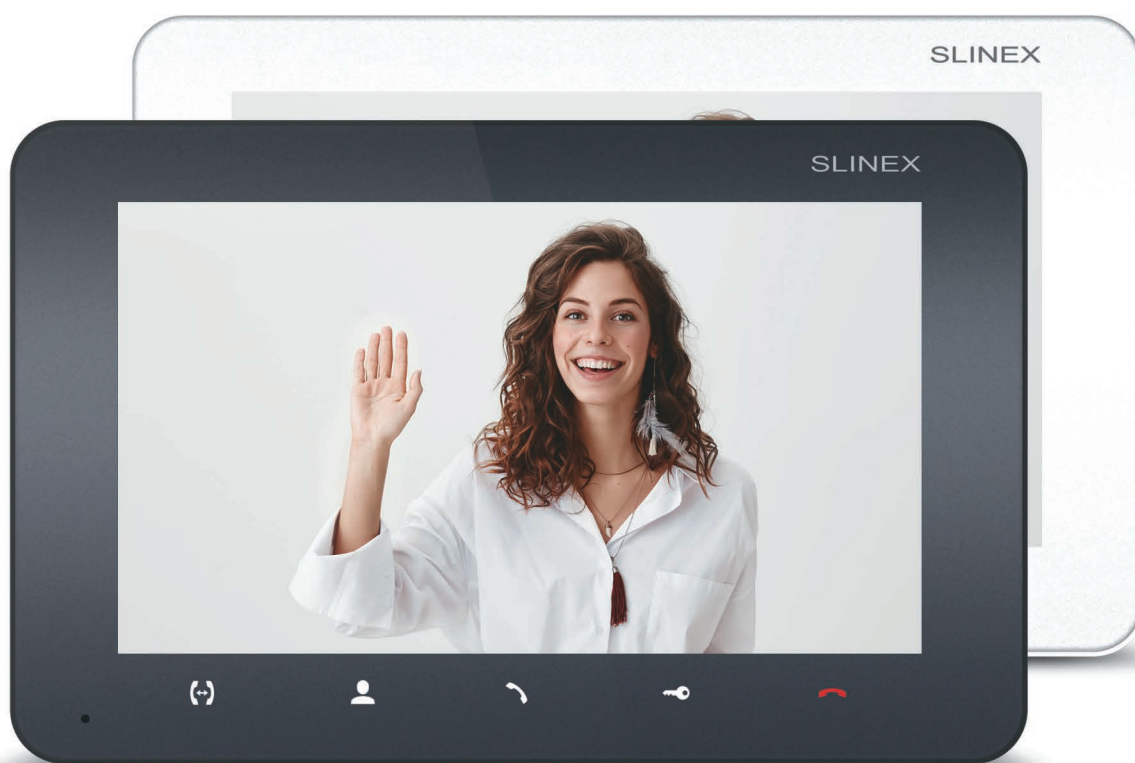

SM-07M is an ideal solution for those who need a low-cost, but full featured video intercom with memory.

In addition to ultra-thin (only 18 mm) body, available in such colors as silver, graphite and white, this model displays an excellent image with resolution of 800×480. One of 16 polyphonic ringtones can be selected in the settings. Photos of visitors can be recorded both on the internal memory (up to 100 snapshots), and the external microSD card up to 32 GB.

Model: **SM-07M**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

7" color TFT screen 16:9

Screen resolution: 800×480

MEMORY

MicroSD card, up to 32 GB

EXTENSION

Outdoor panels quantity: 2 panels

Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 7W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

SL-10IPT, SL-10M, SL-07IP, SL-07M, SQ-07MT HD, SM-07M, SQ-04M, up to 4 monitors. SL-10IPT or SL-07IP can only be used as a main monitor in the system.

INSTALLATION

Surface mount

COLORS


Graphite, white

DIMENSIONS

193×123×18 mm

UNIQUE FEATURES

- 16 polyphonic ringtones
- Adjustable lock opening time
- Adjustable call and conversation volume

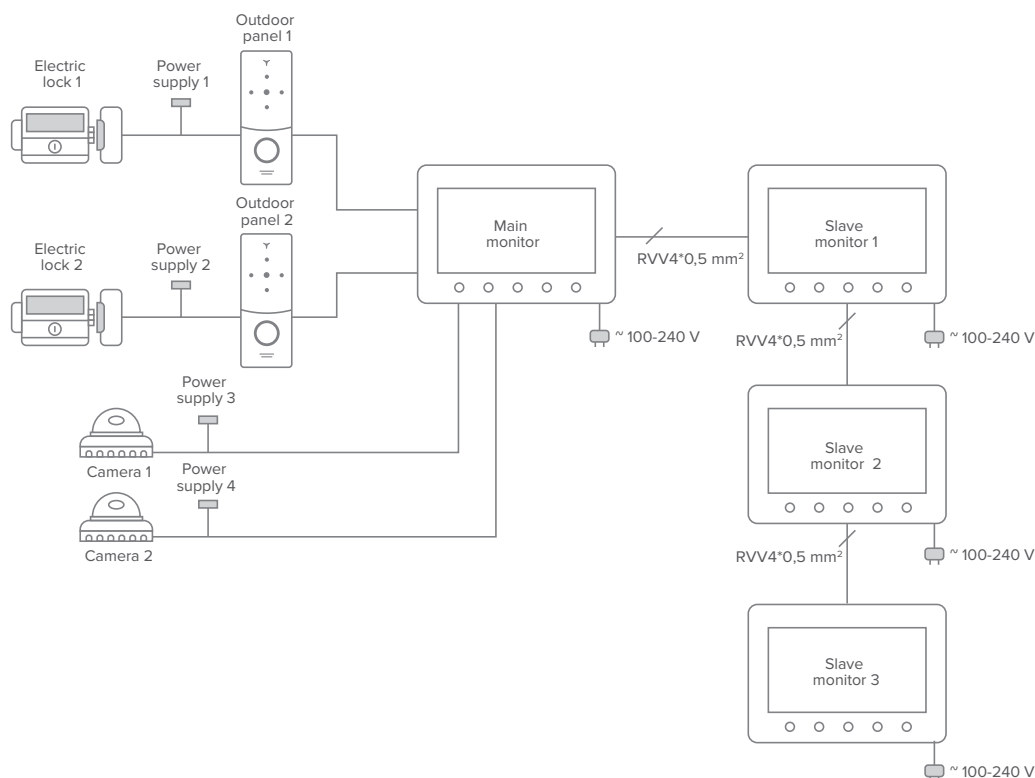

SQ-04M

4.3" color TFT screen 16:9

multifunctional and compact device



SQ-04M is a stylish video intercom with extended functionality.

The absolute advantage of this intercom is a software motion detection that ensures a detection of any action in camera coverage. All data will be recorded and saved on the microSD card. SQ-04M has a 4.3" high resolution screen that allows you to see distinctly all the visitors.

Along with all that, the video intercom has a compact body with internal power supply unit.

Model: **SQ-04M**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

4.3" color TFT screen 16:9

Screen resolution 480×272

MEMORY

MicroSD card, up to 32 GB

EXTENSION

Outdoor panels quantity: 2 panels

Additional cameras quantity: 2 cameras

POWER

Power consumption: up to 6W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

SL-10IPT, SL-10M, SL-07IP, SL-07M, SQ-07MT HD, SM-07M, SQ-04M, up to 4 monitors. SL-10IPT or SL-07IP can only be used as a main monitor in the system.

INSTALLATION

Surface mount

COLORS


White, black

DIMENSIONS

119×175×21 mm

UNIQUE FEATURES

- Software motion detection
- Call melody duration setting
- Three volume modes depending on current time
- Time display in standby mode
- "Do not disturb" mode

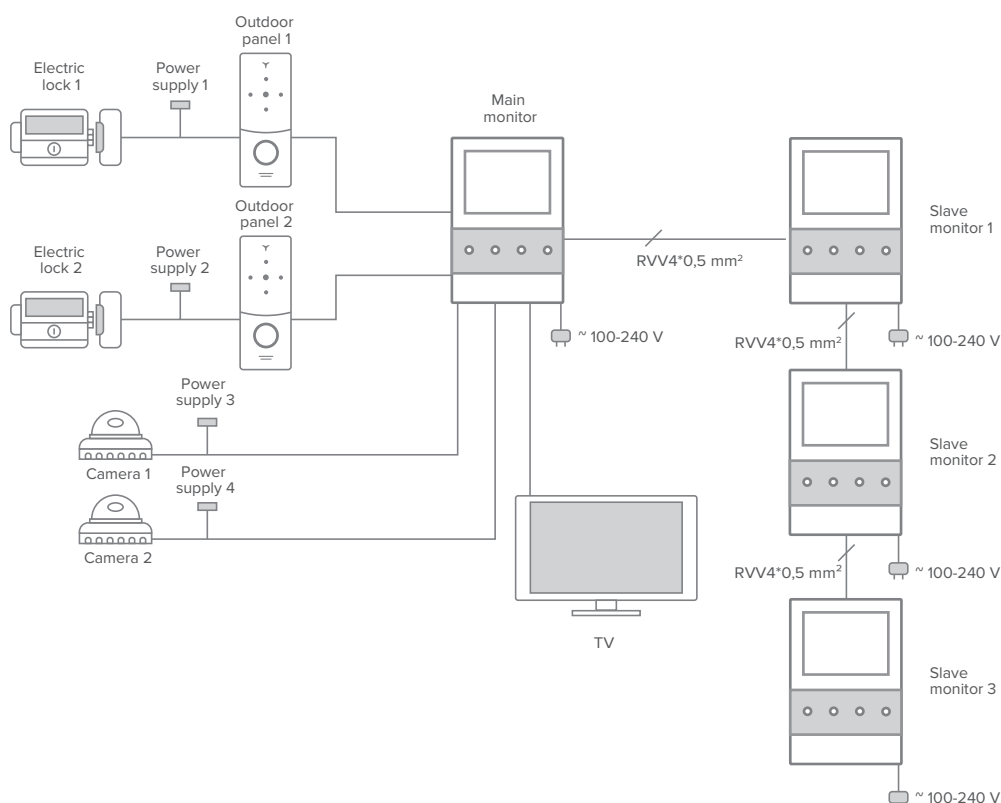

SQ-04

4.3" color TFT screen 4:3
multifunctional and low-cost
models



Compact video door phone with 4,3" TFT monitor of high resolution provides the image transmitting of high quality.

Responsive sensor buttons provide easy control of the door phone. You can connect 2 outdoor panels or 1 outdoor panel and 1 camera. The model is presented in two colors – white and black. It has built-in power supply.

Model: **SQ-04**

Characteristics:

DEVICE TYPE

Video intercom

DISPLAY

4,3" color TFT screen 4:3

Screen resolution: 480×272

MEMORY

No

EXTENSION

Outdoor panels quantity: 2 panels

POWER

Power consumption: up to 6W

Power: AC 100-240V or DC 13.5V

Power supply: built-in

INTERCOM

No

INSTALLATION

Surface mount

COLORS


White, black

DIMENSIONS

119×175×21 mm

UNIQUE FEATURES

- Compact size
- Touch buttons
- Built-in power supply

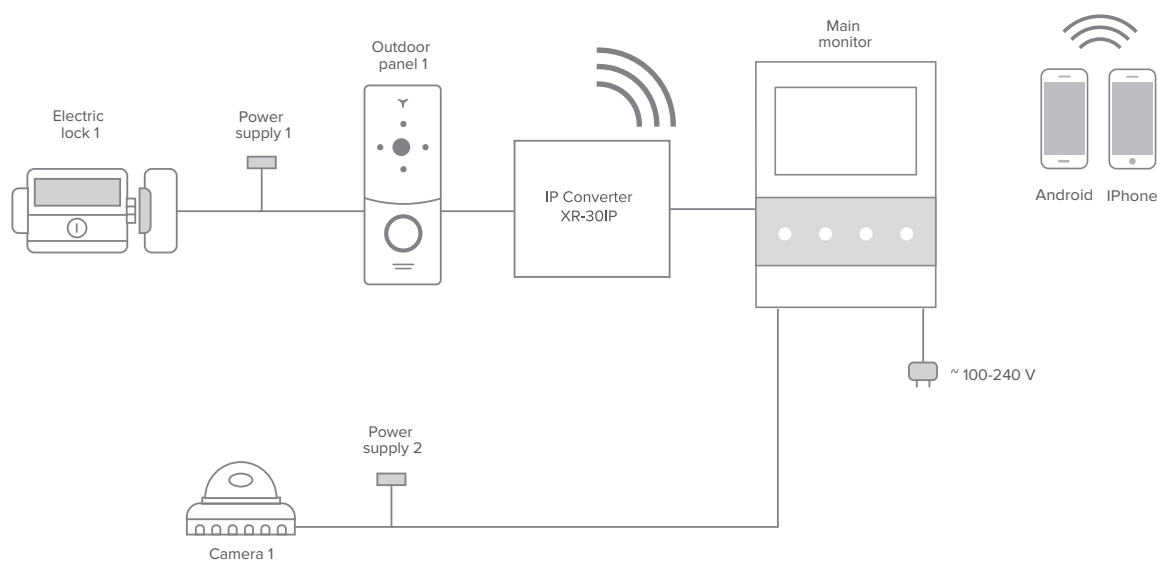

ML-20IP

Outdoor panel
style and functionality



ML-20IP is a unique video doorbell which gives you an ability to receive the call on the smartphone.

A call from the doorbell can be received by all the homeowners' devices simultaneously (iOS and Android). Also, using a cell phone or PC, you can see what happens nearby. By means of software motion detector everything that gets in the secured area will be automatically recorded on the memory card.

ML-20IP can be used as an autonomous video doorbell or as an outdoor video panel for four-wire intercom, then the call will come both to the intercom and the application on a mobile device.

Model: **ML-20IP**

SERIES
ACCESSORIES

23

Characteristics:

DEVICE TYPE

Individual IP outdoor panel

CAMERA

1/4" CMOS, 1MP

Mechanical IR cut filter

Resolution: 1280×720

Angle: 145° horizontal

Light sensitivity: 0.01 Lux

MEMORY

MicroSD card, up to 32 GB (optional)

PROTECTION CLASS

IP65

OPERATING TEMPERATURE

-40 – +50 °C

BACKLIGHT

IR LED, up to 1 m

INSTALLATION

Flush or surface mount

COLORS

Gold + black, gold + white, silver + black

DIMENSIONS


45×130×25 mm

UNIQUE FUNCTIONS

- Ethernet network connection
- Built-in Wi-Fi (external remote antenna)
- Receiving a call using application on smartphone
- Remote viewing from smartphone

FEATURES

- Mechanical IR cut filter
- Touch call button
- MicroSD card up to 32 GB
- Call button backlight
- Wide-angle lens

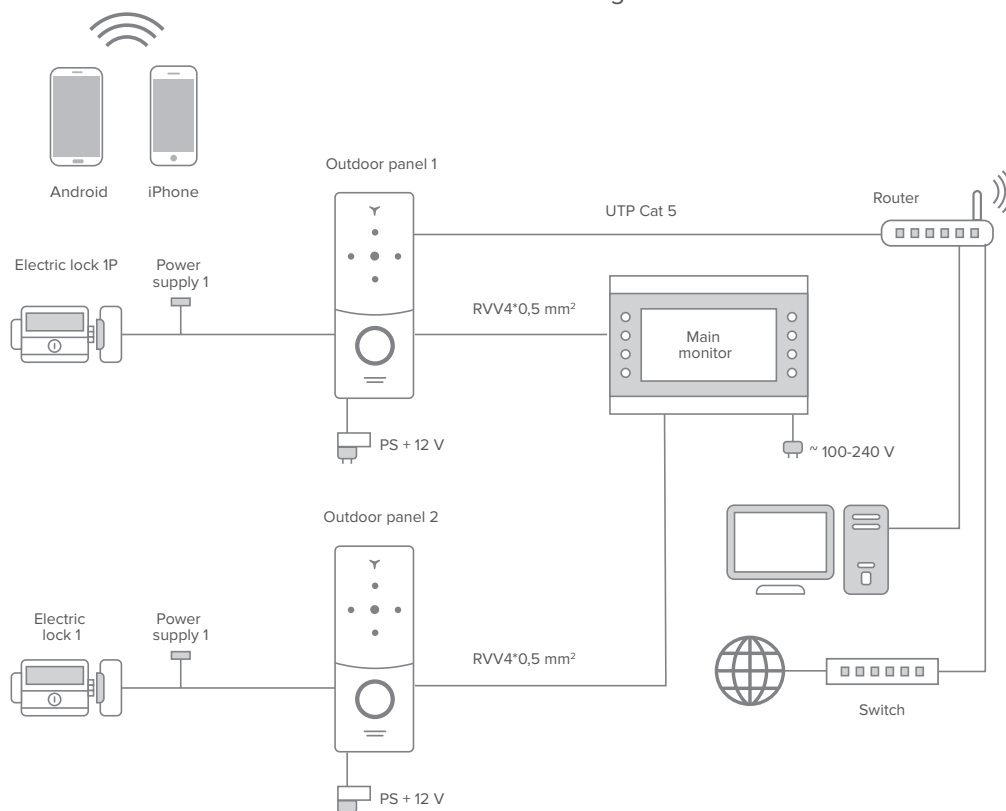

ML-20CR



ML-20CR is an individual outdoor panel with the EM-Marin card reader.

The unique design of ML-20CR effectively distinguishes it from other panels. ML-20CR has a built-in proximity card reader and also can store up to 248 cardholder EM-Marin cards to the protected internal memory. The uniqueness of this model is in supporting two formats of video signals: CVBS and AHD. When you connect the panel to the DVR or video intercom with the function of recording by motion, the recording will be performed continuously or by motion detection, according to chosen settings.

Characteristics:

DEVICE TYPE

Individual outdoor panel

CAMERA

Color CMOS camera

Resolution: 960 TVL

Angle: 145° horizontal

Light sensitivity: 0.01 Lux

PROXIMITY CARD READER

Cards type: EM-Marin

Memory capacity: 248 user cards

OPERATING TEMPERATURE

-40 – +50 °C

BACKLIGHT

IR LED, up to 1.5 m

BODY

Material: metal alloy

Vandal-proof: yes

Protection class: IP65

INSTALLATION

Flush or surface mount

COLORS

Gold + black, gold + white, silver + black

DIMENSIONS

45×130×24 mm

FEATURES

- Built-in IC card reader (Em-Marin)
- Supports both CVBS and AHD
- Call button backlight
- Weigand-26 output
- Mechanical IR cut filter

ML-20HD



Individual outdoor panel with wide view angle and AHD/CVBS support.

Connecting the panel to a DVR or video recorder with a DVR function guarantees viewing of a continuous video recording of an event or the storage of motion detection records without a necessity to make a call.

Characteristics:

DEVICE TYPE

Individual outdoor panel

CAMERA

Color CMOS camera

Resolution: 2 MP (AHD) / 960 TVL (CVBS)

Angle: 150° horizontal

Light sensitivity: 0.01 Lux

OPERATING TEMPERATURE

-40 – +50 °C

BACKLIGHT

IR LED, up to 1.5 m

BODY

Material: metal alloy

Vandal-proof: yes

Protection class: IP65

INSTALLATION

Flush or surface mount

COLORS

Gold + black, gold + white, silver + black

DIMENSIONS

45×130×24 mm

FEATURES

- Supports both AHD and CVBS
- Wide-angle lens
- Mechanical IR cut filter
- Touch call button
- Separate video camera power wire to use it as a source of video for DVR or motion detection recording

MA-02/MA-04



Slinex MA-02 and MA-04 are the outdoor panels for 2 or 4 subscribers with a built-in EM-Marin and Mifare card reader.

The MA-02 and MA-04 models have the same technical characteristics. The only difference is the quantity of supported subscribers: 2 and 4. The outdoor panel of this type is equipped with a camera of high resolution 960 TVL with an angle of view of 138°. Both panels have a built-in EM-Marin and Mifare card reader of cards and internal memory for 248 cards.

Characteristics:

DEVICE TYPE

Outdoor panel for 2/4 subscribers

CAMERA

Color CMOS camera

Resolution: 960 TVL

Angle: 138° horizontal

PROXIMITY CARD READER

Cards type: EM-Marin and Mifare, NFC

Memory capacity: 248 user cards

OPERATING TEMPERATURE

-40 – +65 °C

BACKLIGHT

IR LED, up to 1.5 m

BODY

Material: metal alloy

Vandal-proof: yes

Protection class: IP65

INSTALLATION

Flush mount

COLORS

Silver

DIMENSIONS

110×185×34 mm

FEATURES

- Built-in IC card reader (EM-Marin and Mifare, NFC)
- Supports both CVBS and AHD
- Mechanical IR cut filter

ML-16HR



This outdoor panel has a secure vandal proof body and classic design.

Its protection class is IP65, that means the panel is resistant to any weather conditions. The Slinex ML-16HR has 800TVL camera and is a reasonable budget solution for video intercoms with screen sizes from 4 to 7 inches.

Characteristics:

DEVICE TYPE

Individual outdoor panel

CAMERA

Color CMOS camera

Resolution: 800 TVL

Light sensitivity: 0.01 Lux

OPERATING TEMPERATURE

-40 – +65 °C

BACKLIGHT

IR LED, up to 1.5 m

BODY

Material: metal alloy

Vandal-proof: yes

Protection class: IP65

INSTALLATION

Flush or surface mount

ADDITIONAL ACCESSORIES

Rain cover

Angle bracket

Flush mount bracket

COLORS

Black

DIMENSIONS

41×122×23 mm

ML-15HR



Slinex ML-15HR is a unique panel with a constant video signal.

When you connect the panel to the DVR or video intercom with the function of recording by motion, you get the opportunity to continuous recording or recording by motion detection.

The image from the panel will be recorded, even if the call was not made. Due to the camera's high resolution of 800 TVL, this outdoor panel will perfectly suit for video intercom with a screen diagonal of 7 inches or more.

Characteristics:

DEVICE TYPE

Individual outdoor panel

CAMERA

Color CMOS camera

Resolution: 800 TVL

Angle: 72° horizontal

Light sensitivity: 0.01 Lux

OPERATING TEMPERATURE

-40 – +65 °C

BACKLIGHT

IR LED, up to 1.5 m

BODY

Material: metal alloy

Vandal-proof: yes

Protection class: IP65

INSTALLATION

Surface mount

COLORS

Copper, gray, black

DIMENSIONS

49×128×41 mm (with rain cover)

ADDITIONAL ACCESSORIES

Rain cover, angle bracket

FEATURES

- Button backlight
- Independent camera power supply input to use it as a source of video for DVR and motion detection

RD-30



Wireless video intercom solution. Slinex RD-30 is an ideal solution for those who are thinking about installing an intercom after the finished repair in the apartment or a country house.

RD-30 kit includes an outdoor panel and a handset. Installation of the wireless video intercom does not require special skills, so you can install it even by yourself. You can use both an external power supply DC12V and a Li-Ion battery as power for the outdoor panel.

Slinex RD-30 harmoniously combines functionality, modern design and affordable price.

Characteristics:

OUTDOOR PANEL

FREQUENCY

2.4 – 2.4835 GHz

OPERATING DISTANCE

Up to 150 m in open areas

OPERATING TEMPERATURE

-30 – +55 °C (for panel)

-10 – +45 °C (for handset)

OUTDOOR PANEL POWER

2 LR14 batteries "C" type, or 12 V from an external source

COLORS

Silver outdoor panel

White indoor handset

DIMENSIONS

Outdoor panel: 155×95×37 mm

Indoor handset: 188×53×27 mm

Station: 103×95×80 mm

ADDITIONALLY

- Call button backlight
- Lock control with unlock time setting

HANDSET

DISPLAY

2.4" color TFT screen 4:3

VIDEO RESOLUTION

320×240

HANDSET POWER

Li-Ion battery, 3.7V, 1000mAh

MEMORY

Internal, up to 100 snapshots

SERIES ACCESSORIES

MA-08 (extension unit for MA-02/04)

Slinex MA-08 is an extension unit for MA-02 and MA-04 video doorbell which allows you to expand your intercom system up to 12 recipients.

OPERATING TEMPERATURE

-40 – +65 °C

BODY

Material: metal alloy

Vandal-proof: yes

Protection class: IP65

INSTALLATION



Flush mount

COLORS

Silver

DIMENSIONS


110×185×34 mm

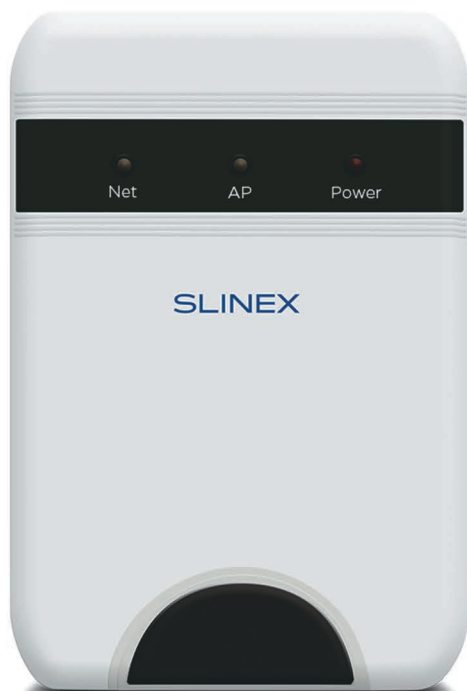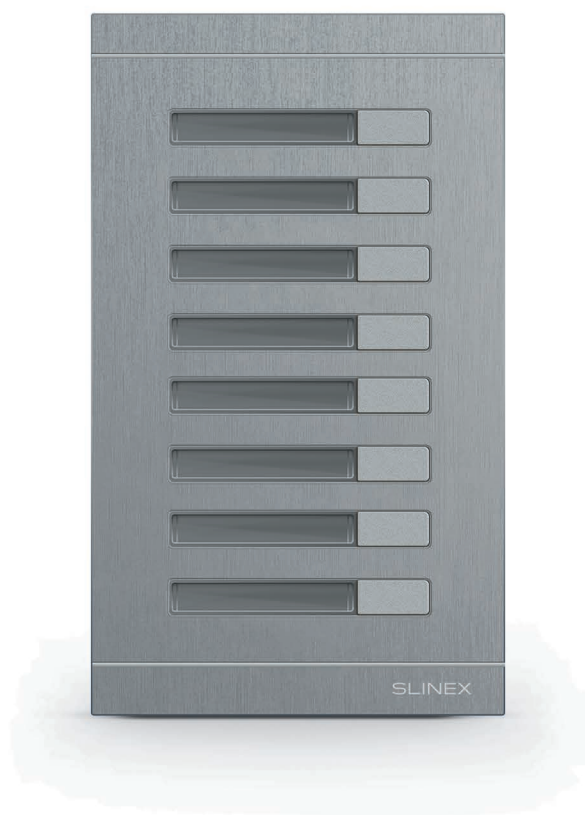

IP converter XR-30IP

This device is intended to send calls from any 4-wire video intercom to the application on a mobile device.

With the help of this application, you can accept the call and talk with the visitor no matter where you are. The main thing is access to the Internet. The software motion detection allows you to be aware of what is happening in front of your door and to save all the information on the up to 32GB microSD memory card.

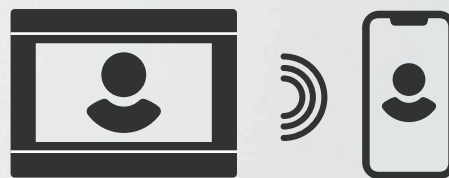

Be aware of who visits you
wherever you are

SLINEX CLOUD CALL

New Slinex Cloud Call application provides you
with even more reliable and quick operation



Possibility to share access to the device
with your relatives or friends




Remote access to the multimedia
archive stored on the monitor or
panels



Change device settings via application
remotely



All the family members get the call
simultaneously, each of them can
answer the call, have the conversa-
tion and unlock the door

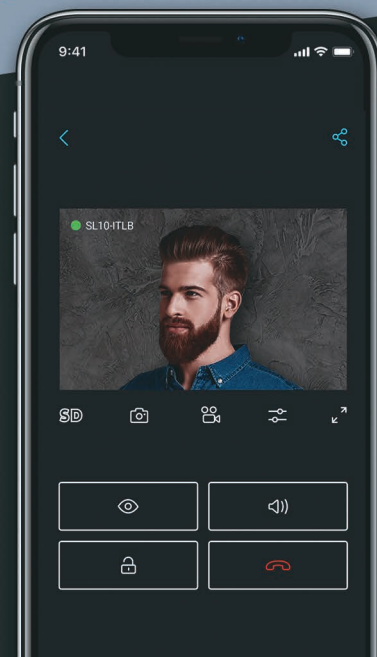

GET IT ON
Google Play



Download on the
App Store

{ Design. Uniqueness. Innovations }

SLINEX



Slinex Technology has direct distributor cooperation in 32 countries all over the world and is constantly developing its business to new countries.

www.slinex.com