


IP converter

XR-40IPHD

XR-40IPHD converter's main function is to transfer incoming calls from 4-wire outdoor panels to the Slinex Smart Call mobile application. This function allows to answer incoming calls from the outdoor panels, open locks and view the image from the cameras using your smartphone. This converter can be used in the 4-wire systems, where outdoor panels and monitors are already installed for more convenient communication with the visitors. Device also has memory slot for microSD card (up to 128 GB) which gives a possibility to save visitor snapshots.

VIDEO SYSTEM	AHD, TVI, CVI (720p, 1080p), PAL/NTSC	POWER	Built-in power supply, ~100 -240 V
VIDEO CHANNELS	2 outdoor panels + 2 cameras	CONSUMPTION	6 W in working mode 2 W in standby mode
MEMORY	MicroSD card, up to 128 GB	BODY STRUCTURE	Plastic
NETWORK INTERFACE	Wi-Fi	TEMPERATURE RANGE	-10 ... +55 °C
INSTALLATION TYPE	Surface mount	DIMENSIONS	181×111×15 mm

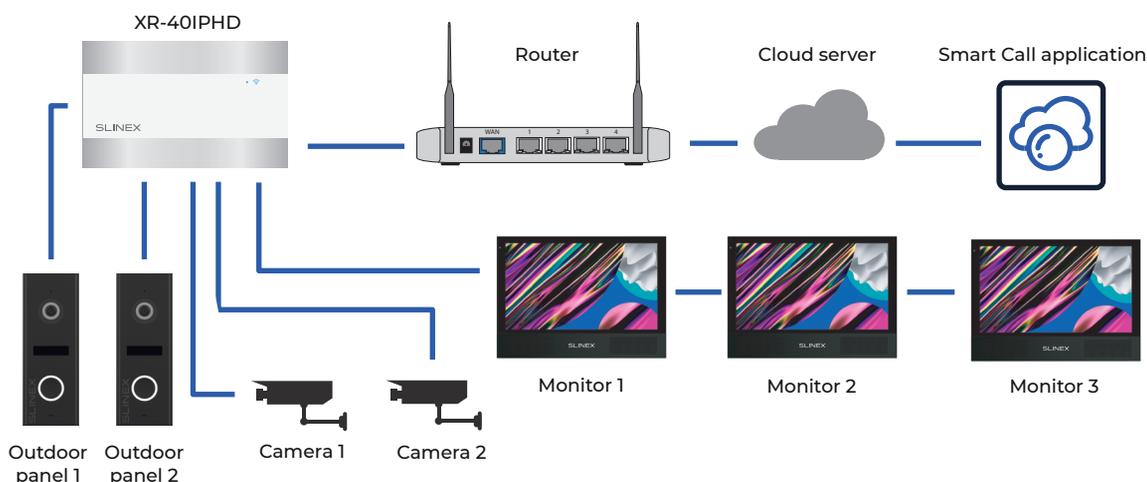

Product page