

SLINEX



CATALOGUE

slinex.com

Design. Uniqueness. Innovations



Since 2005, we have been creating video intercoms, outdoor panels, as well as additional accessories for our devices. Slinex has earned a reputation as a leading innovator in the field of video intercoms. Our slogan: Design. Uniqueness. Innovations.

Design

Choose the device that you like.

A diversity of designs and color solutions will allow you to choose a video intercom and an outdoor panel that fit perfectly in your home.

Uniqueness

Call forwarding to a smartphone. The outdoor panel works even without a monitor.

Ability to build a complete surveillance system. Anti-vandal protection.

This is just a small part of the unique capabilities of Slinex devices.

Innovations

Slinex doesn't just follow trends. It sets a trend.

Crystal Pixel Technology and AHD-H High Definition Camera Support, Cloud Intercom

with Cloud Call technology, IPS screens, as well as support for contactless cards EM-Marlin and Mifare - all that is needed for the most sophisticated user.

Slinex video intercom features



Receiving a call using application on smartphone



Touch screen



Support AHD standart with a resolution up to 1080p (FULL HD)



Built-in power supply



Quadrator



Additional cameras support



MP3 ringtones



Software motion detection



Memory — MicroSD cards up to 256 GB

Slinex outdoor panel features



Mechanical IR cut filter



Built-in IC card reader (Mifare and EM-Marin)



Ultra wide camera lens angle

Video intercoms


SL




SL-10IPT



SL-10M




SL-07IP

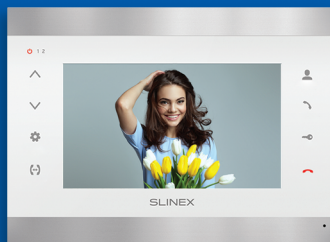

SL-07M

NEW SONIK

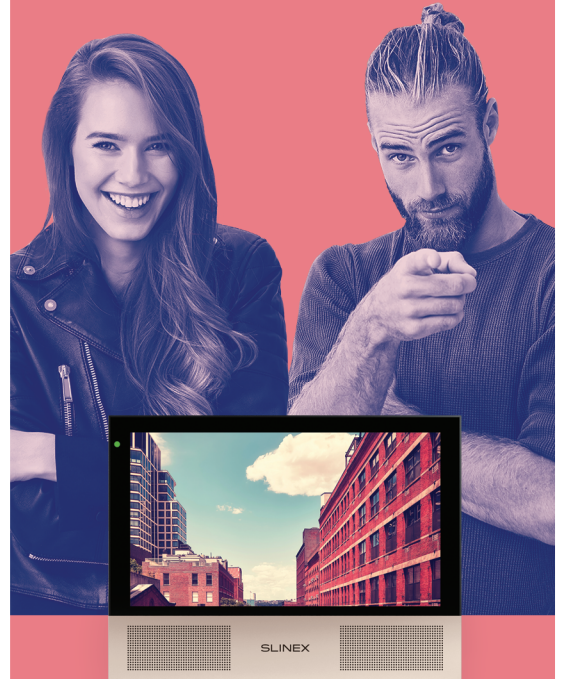


Sonik 7


SQ



SQ-07MT HD




SQ-04M



SQ-04

SM

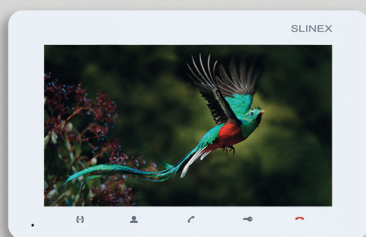

SM-07M

RD



RD-30

Outdoor panels

ML-20



ML-20IP

ML-20CR HD

ML-20HD

ML-30



ML-30CR

ML-16



ML-16HD

ML-16HR

ML-15



ML-15HD

MA



MA-01

MA-02


MA-04

MA-08



Control your video intercom from anywhere in the world

The Cloud Call platform allows you to control the security of your home from your smartphone, wherever you are. The elegant combination of glass and metal will make the SL-10IPT an excellent decoration for your interior.




Product page

Specifications

Display	10" IPS touch screen with 1024×600 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 256 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 12W)
Intercom	Up to 4 monitors in the intercom (SL-10IPT can only be used as a main monitor)
Colors	Silver + black, silver + white, gold + black
Dimensions	304×190×24 mm


Unique features

- Call forwarding to Cloud Call application
- Software motion detection
- AHD, CVI, TVI and CVBS outdoor stations support with a resolution up to 2 MP
- IP cameras support
- Supports both Wi-Fi and Ethernet network connection
- Quadrator
- 16 polyphonic ringtones

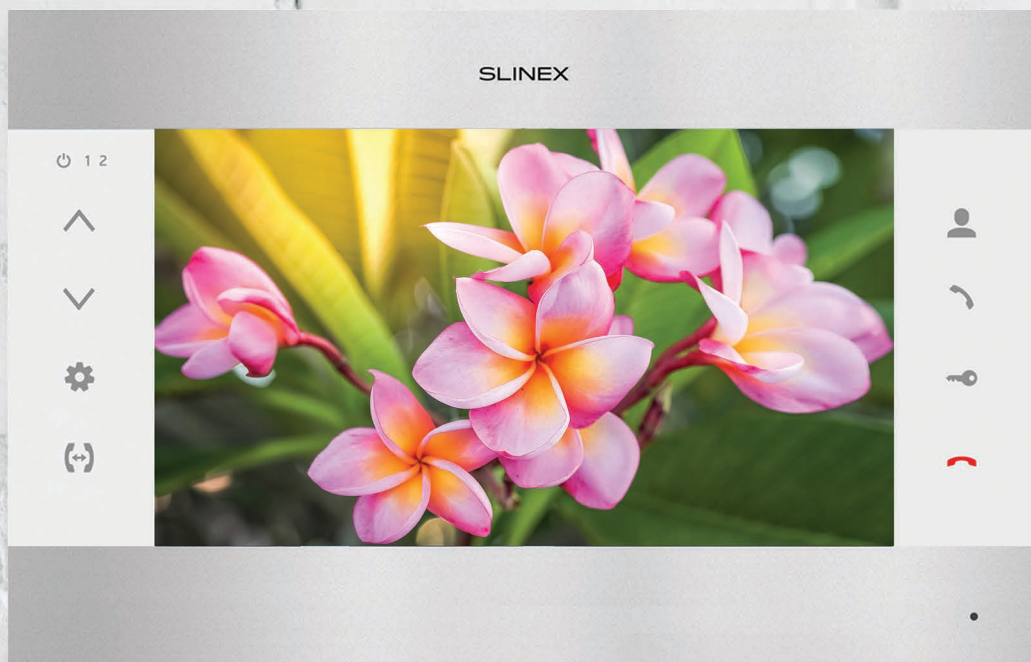

Strict style. Superior quality

A premium video intercom with a large screen that gives crystal clear image quality. Software motion detection recording captures everything happening near the outdoor panel.



Product page

Specifications

Display	10" TFT screen with 1024×600 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 32 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 12W)
Intercom	Up to 4 monitors in the intercom
Colors	Silver + black, silver + white
Dimensions	305×190×23 mm

Unique features

- Software motion detection
- Automatic video recording during motion detection
- Ability to switch on/off the call button backlight
- Three volume modes depending on the current time
- Adjustable call and conversation volume, brightness, contrast and color tuning for each channel



Remote control combined with sophisticated design

A 7-inch model of the SL design line with call forwarding to the smartphone. Control your device using a mobile application or touch buttons.




Product page

Specifications

Display	7" IPS screen with 800×480 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 32 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 12W)
Intercom	Up to 4 monitors in the intercom (SL-07IP can only be used as a main monitor in the system)
Colors	Silver + black, silver + white
Dimensions	230×165×22 MM

Unique features

- Call forwarding to Cloud Call application
- Remote video archive viewing
- Both Wi-Fi and Ethernet network support
- 16 polyphonic ringtones

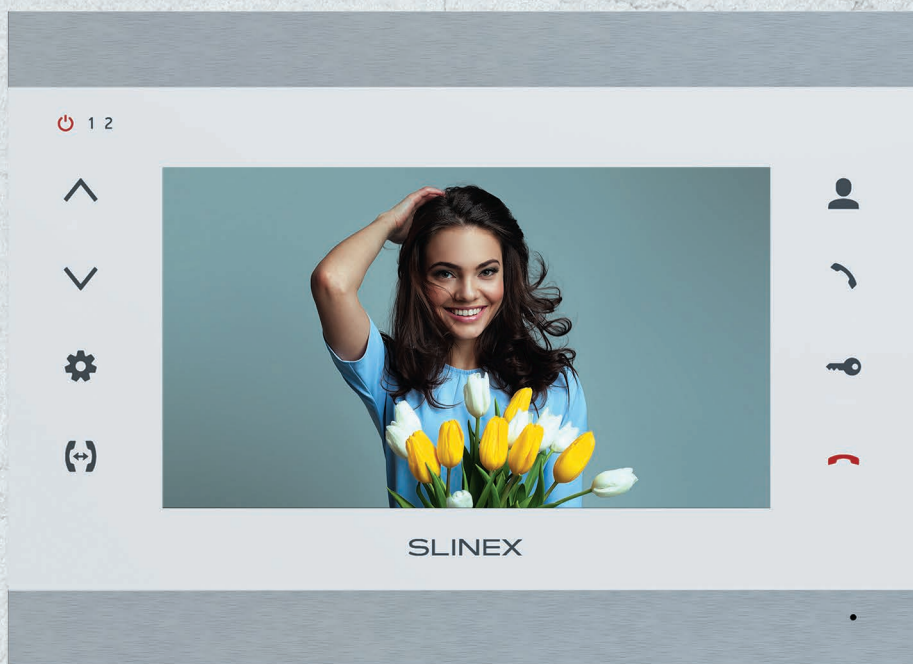

An easy-to-use video intercom with detailed customization

Innovative video intercom with a screen of high resolution, motion detection function and many useful settings. Customize the SL-07M for yourself and it will become your reliable assistant.



Product page

Specifications

Display	7" TFT screen with 800×480 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 32 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 12W)
Intercom	Up to 4 monitors in the intercom
Colors	Silver + black, silver + white
Dimensions	230×165×22 mm

Unique features

- Software motion detection
- Individual call melody duration setting
- Adjustable relay unlocking time
- 12 polyphonic ringtones
- Adjustable call and conversation volume, brightness, contrast and color tuning for each channel
- Ability to switch on/off the call button backlight
- Ability to mute button press confirmation sound

UNIQUE DESIGN

Swappable panels
to reflect your mood

Video intercom

SONIK 7

IPS AHD 1080 Full HD MP3

slinex.com



Design. Uniqueness. Innovations



AHD

FULL HD

IPS

The first-ever video intercom with two powerful speakers and interchangeable color panels in striking combinations

In the Sonik 7 kit you will find 2 colorful interchangeable front panels that you can change depending on the mood. Sonik 7 supports all current video standards: AHD-H, TVI, CVI, CVBS.



Product page

Specifications

Display	7" IPS touch screen with 1024×600 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 64 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 12W)
Intercom	Up to 3 monitors in the intercom
Colors	Black, white
Dimensions	176×133×20 mm


Unique features

- Separate acoustic cameras for speakers
- Video signal type autodetection
- Ability to switch on/off the call button backlight
- AHD, CVI, TVI and CVBS outdoor stations and cameras support
- Smart photo frame
- MP3 ringtones
- Software motion detection



Minimalism in design. Maximum functionality

Support for video standards AHD, TVI, CVI, and CVBS allows you to connect almost any analog video camera. A high-resolution touch screen displays the clearest details of the visitor.



Product page

Specifications

Display	7" IPS touch screen with 1024×600 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 64 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 7W)
Intercom	Up to 3 monitors in the intercom
Colors	Black, white
Dimensions	197×127×20 mm


Unique features

- Software motion detection
- AHD, CVI, TVI and CVBS video standards support
- Outdoor stations and cameras with support a resolution up to 2 MP
- MP3 ringtones
- Hardware motion sensors support
- Call melody ringing duration setting
- Three volume modes depending on current time



Compact solution for advanced security

Despite its small size, the SQ-04M itself recognizes movement, automatically takes photos of visitors and saves them on SD card up to 32 GB size. The stylish design will emphasize your personality.




Product page

Specifications

Display	4,3" TFT screen with 480×272 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 32 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 6W)
Intercom	Up to 4 monitors in the intercom
Colors	Black, white
Dimensions	119×175×21 mm


Unique features

- Software motion detection
- Call melody ringing duration setting
- Three volume modes depending on current time
- "Do not disturb" mode
- Time display in standby mode

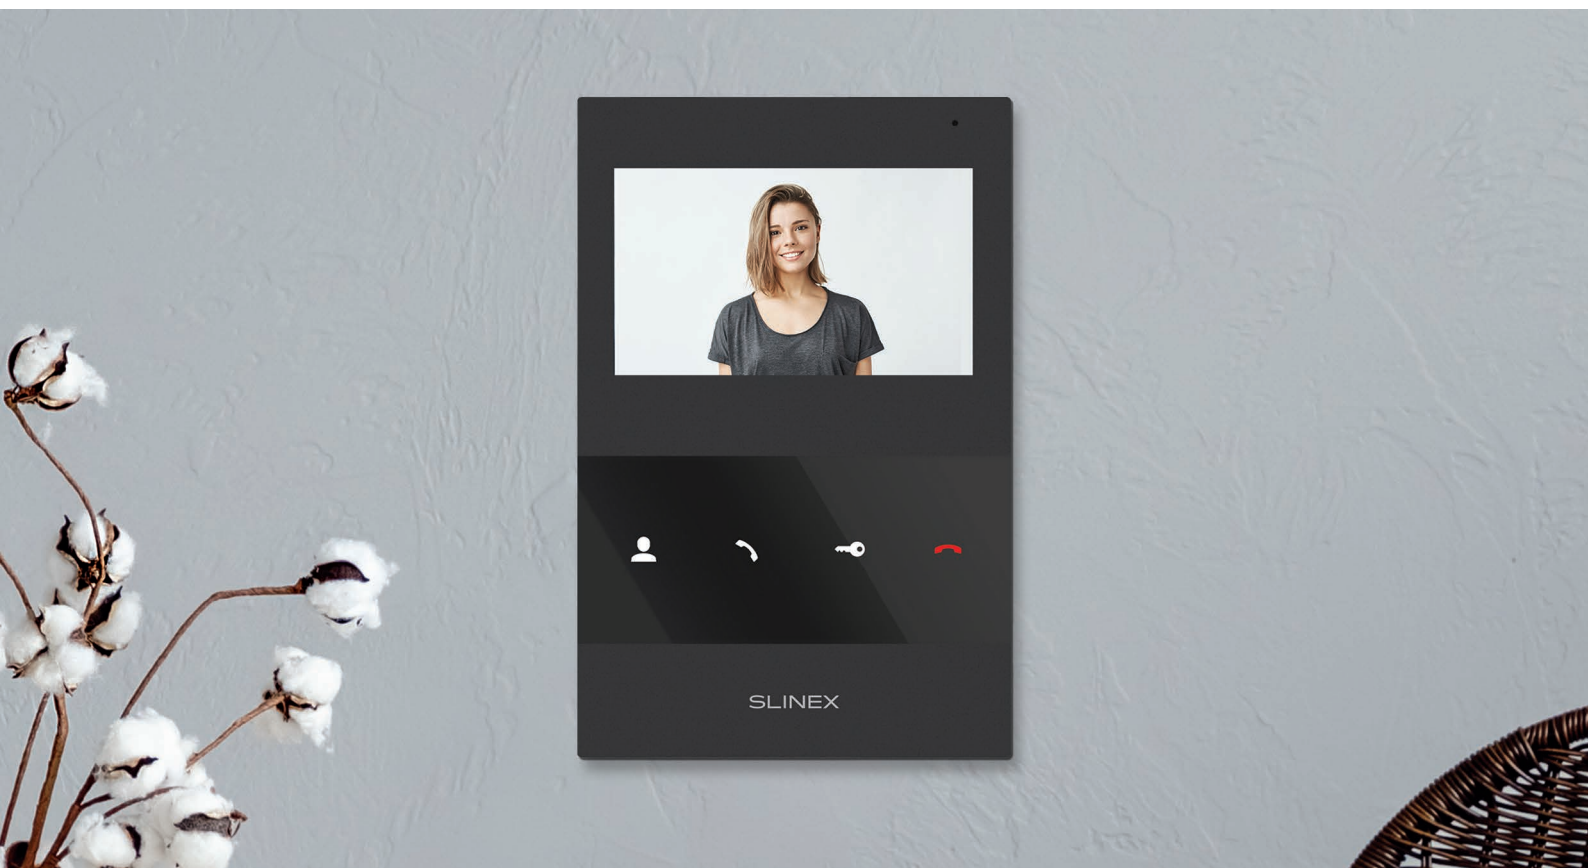

Basic features for maximum convenience

Modern design, compact body, and reliable operation makes SQ-04 a favorite in the initial price segment. Touch buttons and a rich screen will give maximum comfort from use.



[Product page](#)

Specifications

Display	4,3" TFT screen with 480×272 pixels resolution
Extension	Ability to connect 2 outdoor panels (or 1 panel and 1 additional camera)
Power	AC 100-240V or DC 13.5V (power consumption up to 6W)
Colors	Black, white
Dimensions	119×175×21 mm


Unique features

- Built-in power supply
- Touch buttons
- Low power consumption



Ultra slim. Ultra Reliable. Ultra affordable

SM-07M contains many useful features along with a unique design. Convenient control and detailed settings make the video intercom highly customizable and useful in your daily routine.



Product page

Specifications

Display	7" TFT LCD screen with 800×480 pixels resolution
Memory	Internal memory – 100 photos, MicroSD card up to 32 GB
Extension	Ability to connect 2 additional cameras and 2 outdoor panels
Power	AC 100-240V or DC 13.5V (power consumption up to 7W)
Intercom	Up to 4 monitors in the intercom
Colors	Graphite, white
Dimensions	193×123×18 mm

Unique features

- Adjustable relay unlocking time
- Adjustable call and conversation volume
- Internal memory – 100 photos
- Graphic menu
- Software Motion Detection
- 16 polyphonic ringtones



Mobile kit - plug and play


The set includes an outdoor panel and a portable handset. If you made a refurbishment before buying a video intercom, the RD-30 will become a stylish stand-alone solution for your home.

Specifications

Display	2,4" TFT screen with 320×240 pixels resolution
Camera	600 TVL
Viewing angle	96°
Colors	White
Power	Outdoor panel power: 2 LR14 batteries "C" type, or 12V from an external source Handset power: Li-Ion battery BL-5C (3.7V, 1100mAh)
Dimensions	Station: 80×95×104 mm Indoor handset: 53×188×26 mm Outdoor panel: 105×167×50 mm

Unique features

- The operating distance is up to 100 meters
- Internal memory – 100 photos
- Operating frequency range: 2.4– 2.4835GHz
- Wireless Handset



Product page



The outdoor panel will do everything by itself. You just have to enjoy

The most independent and intelligent outdoor panel, working without an external monitor, forwards the incoming calls to your smartphone and records video on a memory card.



Product page

Specifications

Camera	2MP
Viewing angle	145°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	DC/AC 12-24V (power supply included)
Colors	Silver + black, gold + black
Dimensions	45×130×24 mm


Unique features

- Call forwarding to Cloud Call application
- Remote video archive viewing
- Both Wi-Fi and Ethernet network connection support
- Internal memory – 16GB
- Mechanical IR cut filter
- Call button backlight



Provide access to the premises to anyone you want

The ML-20CR HD can store up to 248 EM-Marin access cards in its memory. You can provide access to the premises to all office employees or residents of an apartment building.



Product page

Specifications

Camera	2MP (AHD) / 1MP (AHD) / 960TVL (CVBS)
Viewing angle	115°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	DC 12V (power supply included)
Colors	Silver + black, gold + black
Dimensions	45×130×24 mm


Unique features

- EM-Marin card reader
- Wiegand-26 output
- Mechanical IR cut filter
- Camera operation modes switcher (AHD-H, AHD-M, CVBS)
- Call button backlight



The best video camera ever used in video intercom

Incredible 2 megapixels with a viewing angle of 115° will give you the most detailed and widest image. Combined with the design of the ML-20 line, the panel turns into real art.



Product page

Specifications

Camera	2MP (AHD) / 1MP (AHD) / 960TVL (CVBS)
Viewing angle	115°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	DC 12V from a monitor
Colors	Silver + black, gold + black
Dimensions	45×130×24 mm

Unique features

- Mechanical IR cut filter
- Separate video camera power wire to use it as a source of video for DVR
- Call button backlight with gradient
- Camera operation modes switcher (AHD-H, AHD-M, CVBS)



The next generation doorbell with a code pad in a unique design

A convenient solution for easy access control. Provide a security code or an electronic key for authorized users. Full HD camera captures high-quality photos and videos of your guests.



Product page

Specifications

Camera	2MP (AHD) / 1MP (AHD) / 960TVL (CVBS)
Viewing angle	150°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	DC 12V (power supply included)
Colors	Black
Dimensions	48×133×19 mm

Unique features

- Camera operation modes switcher
- Mechanical IR-cut filter
- Keypad backlight
- MIFARE card reader
- Door unlocking by pin code


AHD

FULL HD



Maximum resolution in your favorite design

The device retained the beautiful design of the ML-15 line, but was updated with more detailed 2-megapixel camera.



Product page

Specifications

Camera	2MP (AHD) / 1MP (AHD) / 960TVL (CVBS)
Viewing angle	86°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	AC12V
Colors	Gray, black
Dimensions	54×134×40 mm


Уникальные функции

- Mechanical IR cut filter
- Separate video camera power wire to use it as a source of video for DVR
- Vandal-proof metal housing
- Call button backlight
- Camera operation modes switcher
- Angle bracket, wall mounting bracket and rain shield are included



Safety in detail

The metal case of the ML-16 line in combination with HD camera makes this panel one of the most secure of all Slinex panels. Vandals simply will not be able to harm her, and you will be able to examine the trespassers in detail.



Product page

Specifications

Camera	2MP (AHD) / 1MP (AHD) / 960TVL (CVBS)
Viewing angle	86°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	DC 12V from a monitor
Colors	Black
Dimensions	41×122×23 mm


Unique features

- Mechanical IR cut filter
- Automatic night-time mode detection
- Metal alloy
- Camera operation modes switcher
- Angle bracket, wall mounting bracket and rain shield are included



Metal is a reliable solution with compact dimensions

Call panel provides maximum protection against external influences with high-resolution camera and IP65 protection class.



Product page

Specifications

Camera	800 TVL (CVBS)
Viewing angle	72°
Protection class	IP65
Backlight	IR LED
Power	DC 12V from a monitor
Colors	Black
Dimensions	41×122×23 mm

Unique features

- Automatic night-time mode detection
- Metal alloy
- Compact size



One panel - many subscribers

All-metal door station with integrated proximity card reader 248 EM-Marlin, MIFARE, powerful 6-LED backlight and high-quality microphone.

Specifications

Camera	2MP (AHD) / 1MP (AHD) / 960TVL (CVBS)
Viewing angle	115°
Protection class	IP65
Backlight	IR LED with mechanical IR cut filter
Power	DC 12V (power supply included)
Colors	Silver
Dimensions	110×185×34 mm

Unique features


- 6 LEDs backlight
- Call buttons for 1, 2 or 4 subscribers
- Camera operation modes switcher (AHD-H, AHD-M, CVBS)
- Combined EM-Marlin/MIFARE reader
- Name plates with a backlight
- Mechanical IR cut filter



Product page
MA-01



Product page
MA-02



Product page
MA-04



Up to 20 subscribers with just one call panel

The MA-08 is an expansion module for the MA-01, MA-02, and MA-04. Any MA outdoor panel can be expanded with two MA-08 units to increase the maximum number of subscribers up to 20.



Product page


Specifications

Color	Silver
Dimensions	110×185×34 mm
Power	From MA-01, MA-02, or MA-04
Protection class	IP65
Material	Metal alloy
Operating temperature	-40 – +65 °C

Unique features

- Name plates with a backlight

Accessories



XR-30IP – IP converter

The converter makes it possible to transfer calls of any 4-wire video intercom to an application installed on a mobile device.

Using the application, you can receive a call and talk with a visitor, regardless of location.

- Software motion detection
- MicroSD card up to 32 GB
- Network interfaces — 10/100M и Wi-Fi
- Video system — PAL/NTSC



CH-01 – Wireless chime

Wireless chime Slinex CH-01 is easy to install and has an excellent working range to outdoor panel ML-20IP.


- 38 melodies
- Surface mount
- Works only with Slinex ML-20IP



MA-MB – Surface mounting bracket

Stainless steel bracket for MA-01, MA-02, MA-04, and MA-08 panels.

- Material: stainless steel
- Dimensions: 114×188×39 mm




VZ-10 – Adapter

Adapter for connecting 4-wired intercoms to coordinate multi-apartment system 2-wired (Vizit, Cyfral, Metakom)


- Power consumption: 1W
- Dimensions: 50×30×15 mm
- Power: DC 10-15V

Connectivity Guide

Standard connectivity Guide

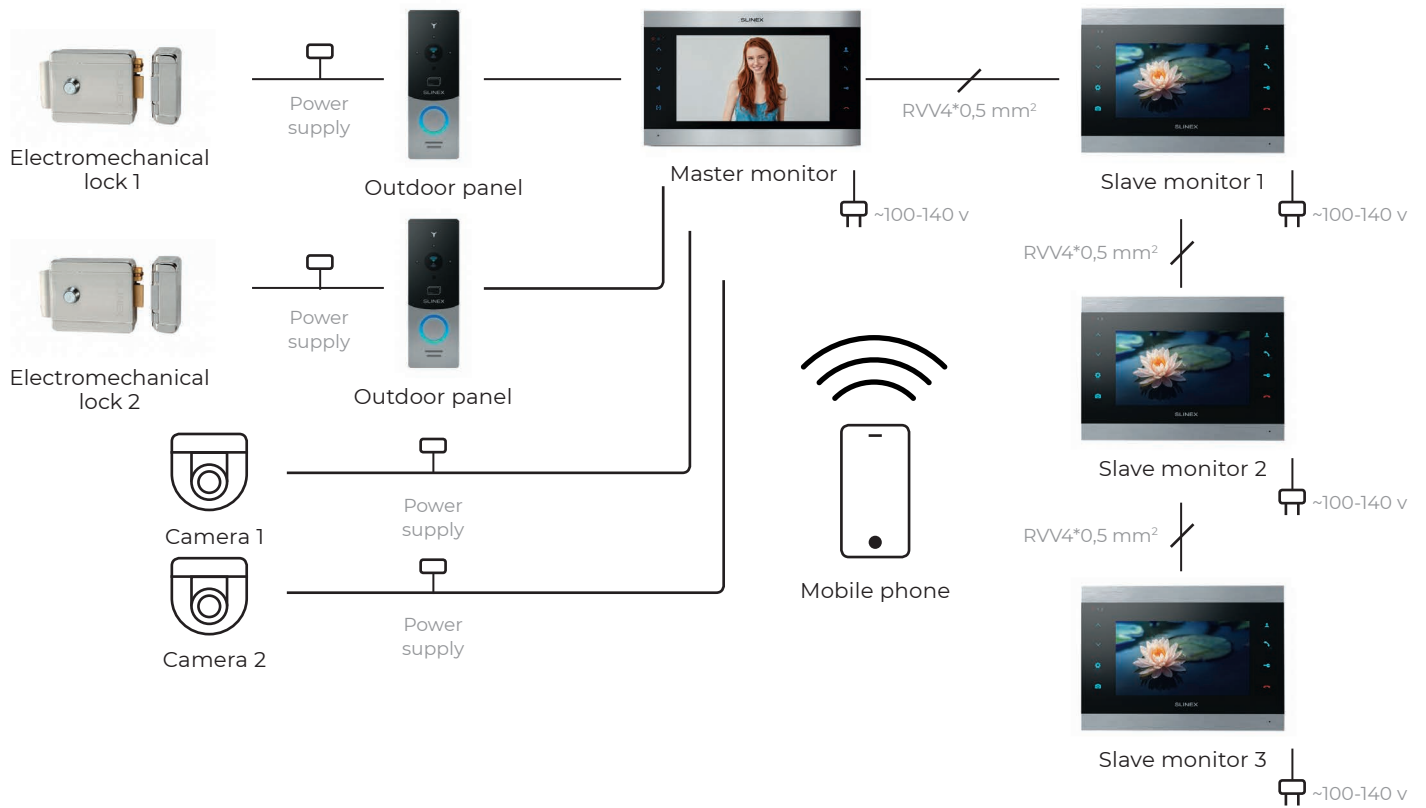

Wiring diagrams Slinex SQ-04

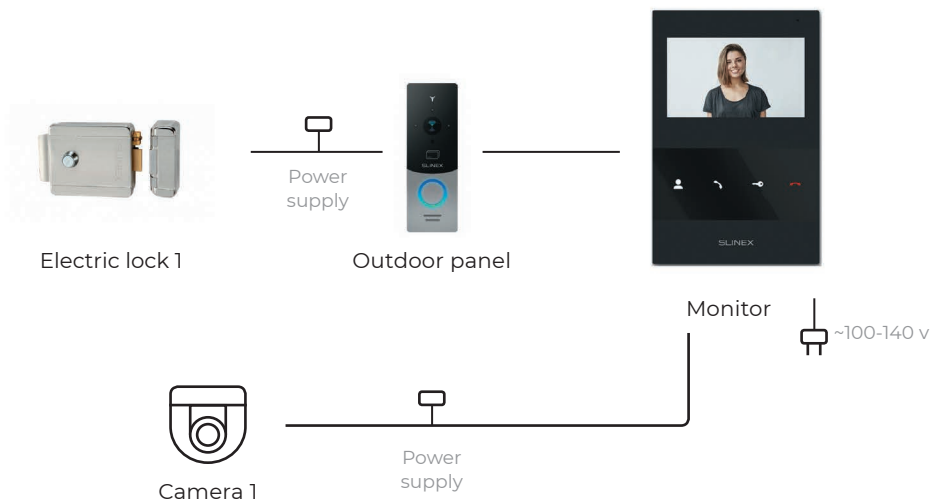

Style and technology available for everyone



Wireless video intercom **RD-30**



Specifications:

- 2.4" TFT screen with 320x240 pixels resolution
- Internal memory — 50 photos
- Protection class — IP65
- Viewing angle — 96°
- Color — white

Unique features:

- The operating distance is up to 100 meters
- Internal memory — 100 photos
- Frequency range: 2.4–2.4835GHz
- Wireless handset



Slinex Cloud Call

New mobile application for call forwarding to a smartphone



Reception of incoming calls from visitors from the outdoor panel and opening of the connected lock



Remote viewing of photo/video archive



Access to application settings



Guest access (the ability to provide access to equipment without additional settings)



SLINEX

www.slinex.com

 facebook.com/SlinexInternational

 Our channel: Slinex International

 instagram.com/slinex_international/

 linkedin.com/company/slinex-international/